


EXIVISION


115 Volt Automatic Transfer Switch with terminal block connections for all power ratings from 3A -30A




Diagram

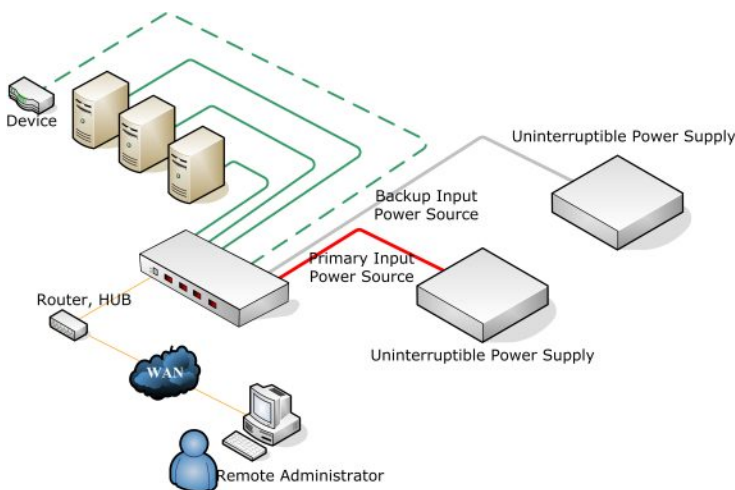

Software Interface




ATS Management



Event Log



SNMP Management



SNMP Utility

EXV-ATS-3011T-01T1 Functionality

Critical Equipment Demands Continuous Power Availability

An EXV Automatic Transfer Switch is designed to support mission-critical network and communications equipment where downtime is not an option—and space is at a premium. Its small package and installation flexibility are ideal for high density applications such as equipment racks and enclosures. It provides reliable, redundant AC power from two alternative sources to critical connected load.

Two Power Sources, One Solution

An EXV ATS is a dual input, rackmountable power distribution unit (PDU) with a built in automatic transfer switch. The Micro SmartSwitch is capable of receiving power from two independent AC power sources and utilizes a built-in automatic AC transfer switch to quickly switch between them. This provides AC power line redundancy to critical computer or communications equipment in a rack environment.

An EXV ATS is designed to be mounted in a "1U" configuration within a rack, allowing it to be used in a wide variety of applications.

Complete connectivity options

The EXV "T" (Terminal Block) provides two terminal block connectors on the input side, one for each of the alternative inputs, and one on the output side, for the connected equipment or PDU. The unit is rated at up to 30A, so is ideal for use where available power is determined by existing infrastructure. For instance, IEC C13/C14 can be used for 10A applications, C19/C20 for 16A, NEMA 5-15 can be used for standard US mains plug applications, the possibilities are endless. LED indicators on the front panel indicate whether utility power is being supplied by the primary source phase "A" or secondary

Built-in Network Module

The T series ATS also has a built-in network module. It can provide both the power source information and notify an administrator when the power source transfer is triggered.

Power Management Technology

1. Centralized power management for various server platforms and heterogeneous power devices.
2. Ultra flexibility, Console/Manager/Agent three layers of management available.
3. Supports various brands of UPS & battery management.

Features

Meter	True RMS Current Meter, Voltage, Frequency, Power Factor, Active Power, Apparent Power, Total kWh, Sub-total kWh.
Power Monitor	Total Power Monitoring by Meter, Web, SNMP, Free Bundled Software
Protocols	Http, Https, SNMP, DHCP, UDP
Alarm Thresholds	User-Defined Alarm Thresholds for Warning and Overload
Event Alert	Email, Trap, Audible Alarm
Temp./Humidity	Option Accessory
Power Action	Automatic Transfer Switch

Specification

General

Output	(1) Terminal Block
Input	(2) Terminal Block

Communication

SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 316A Resolu- tion: 0.1A Precision: +/-2% +/-0.1AMP

Operation

Nominal Voltage	100V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amps
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003

